

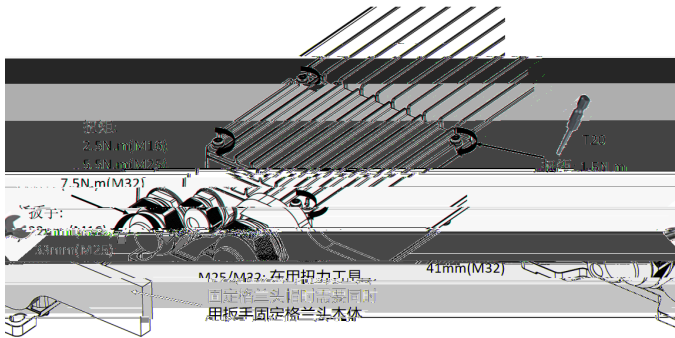


NES-1K8-BC

LED

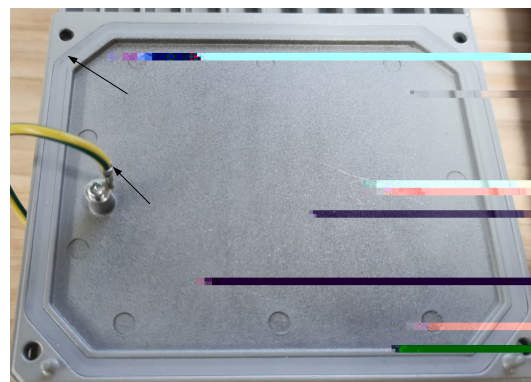


	1.5 N.m	T20
	2.5 N.m	22mm
	5.5 N.m	33mm
	7.5 N.m	41mm

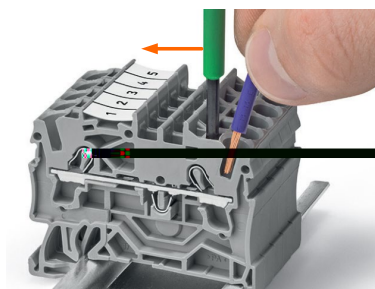


线径 AWG	截面积 (mm ²)	接头位置	格兰头	扭矩 (N·m)	直径 (mm)
15-12	1.5-2.5	AC 输入	M25	5.5	13-18
15-12	1.5-2.5	DC 输出	M32	7.5	15-21
18-18	0.75-1.5	DALI/DMX	M16	2.5	14-18
18-18	0.75-1.5	DALI/DMX	M16	2.5	14-18

$L < 100\text{m}$ 1.5 mm^2
 $100\text{ m} < L < 300\text{m}$: 2.5 mm^2



NES-1K8T210BC

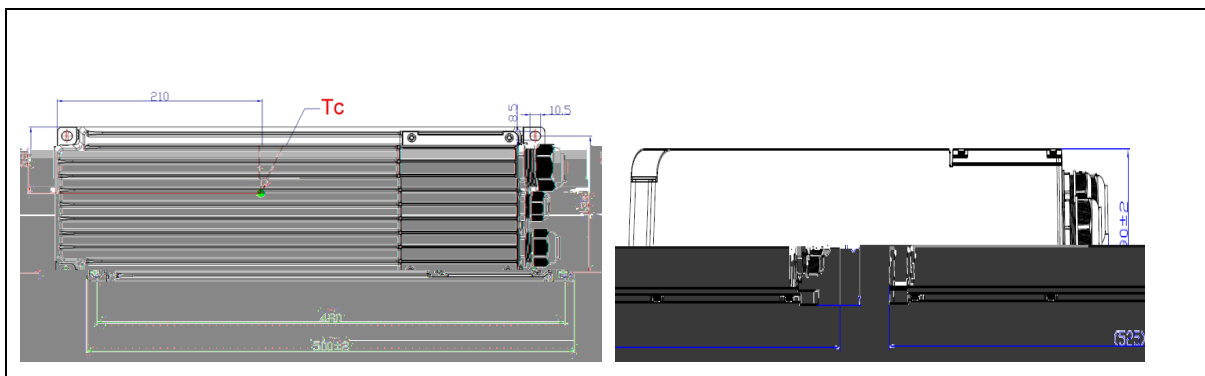

LED

80°C

220	5.8	11200
400	12	6800

B6	0	0
B10	0	0
B16	1	1+1+1
B20	1	1+1+1
B25	1	1+1+1
B40	2	2+2+2
C6	0	0
C10	0	0
C16	1	1+1+1
C20	1	1+1+1
C25	2	2+2+2
C40	3	3+3+3

LED

<https://www.inventronics-co.com/technical-support/>